




## SIP-WC1D2 SERIES CERTIFICATIONS AND RATINGS

RATED UP TO WCID2 , FEATURING 140 LUMENS PER WATT, THREE POWER OPTIONS, AND THREE AVAILABLE BEAM ANGLES; THE SIP-WCD2 SERIES BRINGS VERSATILITY, DESIGN EXCELLENCE, AND DURABILITY TO HAZARDOUS LOCATION LIGHTING. THE SIP-WC1D2 SERIES IS SUITABLE WHEN FLAMMABLE GASES, CORROSIVE VAPORS, COMBUSTIBLE DUSTS, AND OTHER HAZARDS ARE PRESENT.


CLASS I DIVISION 2, GROUPS A,B,C,D  
 CLASS II DIVISION 1, GROUPS E,F,G  
 CLASS II DIVISION 2, GROUPS F,G  
 CLASS III  
 CSA C22.2 No. 137-M1981; 25-1966  
 CSA C22.2 No. 250.0-08; 250.13  
 UL 844 HAZARDOUS LOCATION  
 UL 1598A MARINE VESSELS  
 UL 1598 WET LOCATIONS  
 UL 8750 LED SAFETY  
 IK08 (GLASS), IK10 (PC)  
 ABS (PENDING)




PICTURED WITH YOKE MOUNTING OPTION



### DIMENSIONS

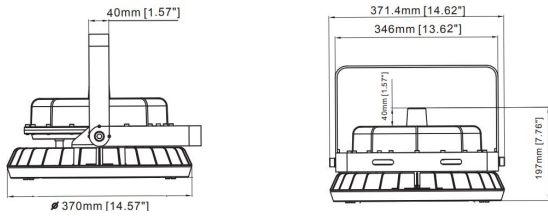

150W 200W

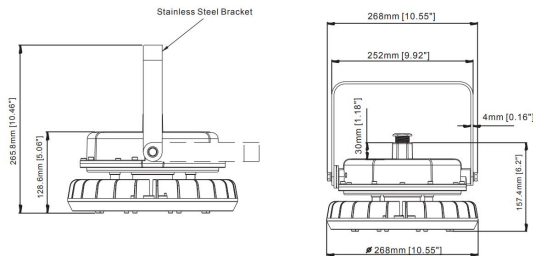

40W 60W 80W 100W

### SPECIFICATIONS

VOLTAGE/FREQUENCY	AC120-277V 50/60HZ AC200-480V 50/60HZ
POWER FACTOR	≥99%
THD	<10%
SURGE PROTECTION	4KVA
AMBIENT TEMPERATURE	-40°F TO 140°F (-40°C TO 65°C)
T-CODE RATING	CLASS II DIVISION 2 - T4A
CONSTRUCTION	DIE-CAST ALUMINUM
LENS MATERIAL	TEMPERED GLASS
HARDWARE	MARINE GRADE STAINLESS STEEL
FINISH	THERMOSET POWDERCOAT
CONNECTION	3/4" NPT
POWER	40W 60W 80W 100W 150W 200W
LUMEN OUTPUT	140 LM/W
AVAILABLE OPTICS	25° 60° 120°
COLOR RENDERING INDEX	RA>70
L70	>50,000 HOURS
WARRANTY	LEDs: 10 YEARS DRIVER: 5 YEARS



# ORDER INFORMATION

# SIP-C1D21 SERIES




EXAMPLE: SIP-C1D2-80-120-277-5000K-120-H2-CLR-GREY-PEND

SIP-C1D2	80	120-277	5000K	120	H2	CLR	GREY	PEND
----------	----	---------	-------	-----	----	-----	------	------

FIXTURE	WATTAGE	VOLTAGE	CCT	BEAM	RATING	LENS	COLOR	MOUNTING
	40W	120-277	5000 K	120°	H2-C1D2	CLEAR	GREY	PENDANT
	60W	200-480*	4000 K	60°				
	80W		3000K	25°				
	100W							
	150W							
	200W							



## PHOTOMETRICS

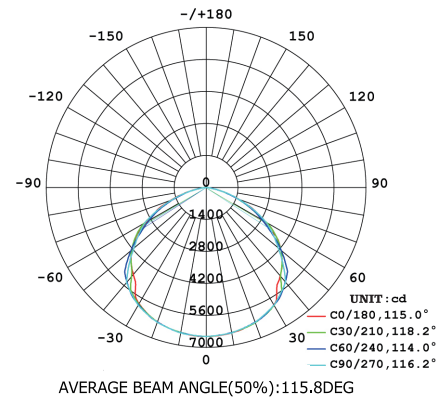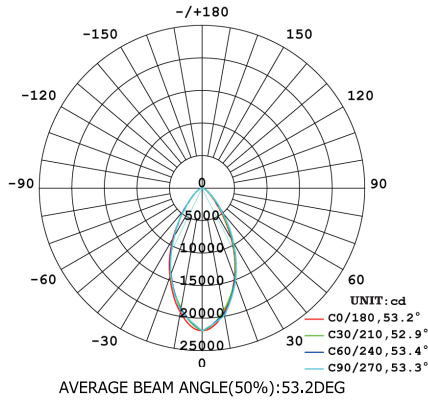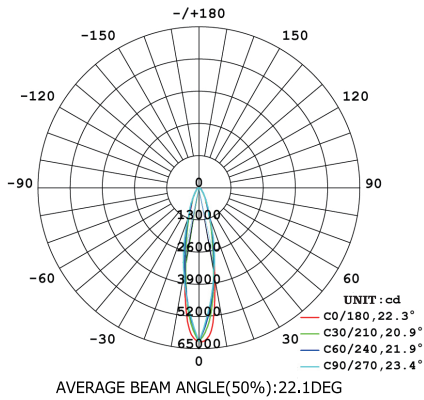

SALES@SIINPROLIGHTING.COM

5756 GRACEPI, LOSANGELES CA 90022, USA

WWW.SIINPROLIGHTING.COM

